



LED Panel Light

WSL-PNL-ZBL (Back-lit)



SPECIFICATIONS

- Input voltage: AC100-277V
- Operating frequency: 50/60Hz
- Power factor: > 0.95
- Ambient temperature range: -20°C ~+45°C
- Color Temp: 3000-5000K
- Dimmable: 3-in-1 dimming
- THD: <10%
- IP Rating: IP40
- CRI: >Ra80
- Beam angle: 120°
- Housing material: 6063-T5
- Certification: ETL/cETLus,DLC
- Warranty: 5 years

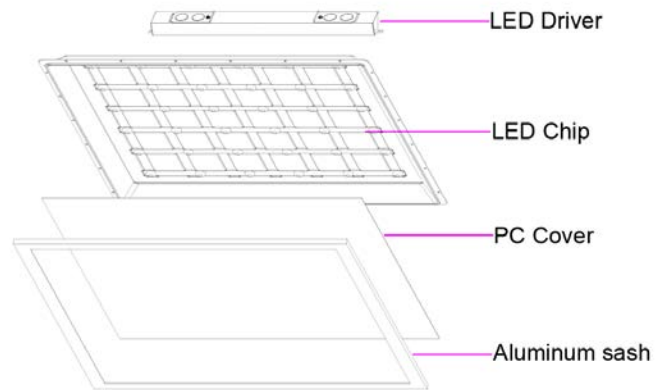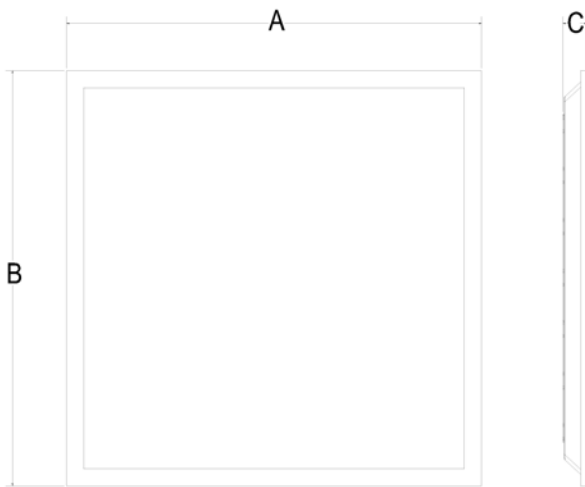

Maximum overall	A	B	C
2*2ft	603mm	603mm	30mm
2*4ft	1213mm	603mm	30mm

PARAMETER

Length	Product code	Wattage	Function	3000-5000K	Packing / Carton	G.W./carton
2*2 FT	WSL-PNL-ZBL-2*2-40W	40W	3-in-1 dimming(0-10V;PWM;Rx)	AC100-277V	650*250*650mm 6 pieces 1*40HQ Loading = 3672pcs	15kg
2*4 FT	WSL-PNL-ZBL-2*4-49W	49W	3-in-1 dimming(0-10V;PWM;Rx)	AC100-277V	1260*250*650mm 6 pieces 1*40HQ Loading=1944pcs	26kg
2*4 FT	WSL-PNL-ZB L-2*4-72W	72W	3-in-1 dimming(0-10V;PWM;Rx)	AC100-277V	1260*250*650mm 6 pieces 1*40HQ Loading=1944pcs	26kg